




FEATURES

- Low cost construction
- Low forward voltage drop
- Low reverse leakage
- High forward surge current capability.

260°C/10 seconds, 0.375" (9.5mm) lead length
at 5 lbs (2.3kg) tension.

MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V - 0 rate flame retardant.
- Polarity: Color band denotes cathode end.
- Lead: Plated axial lead, solderable per MIL - STD - 202E method 208C
- Mounting position: Any
- Weight: 0.012 ounce, 0.33grams

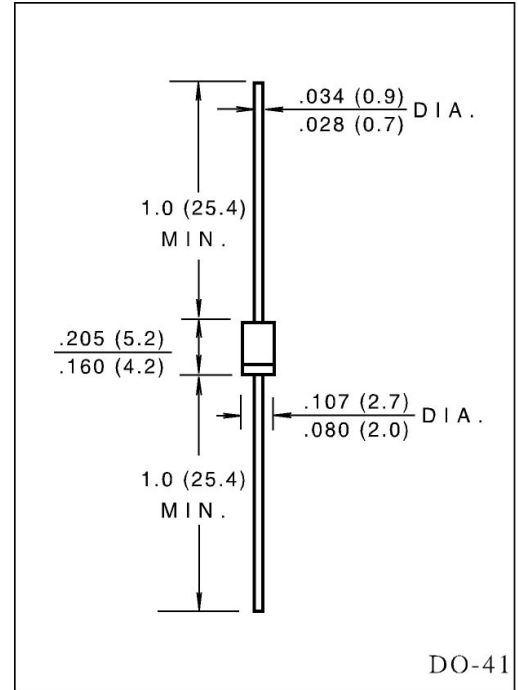

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%

| | |
|----|---------|
| 30 | |
| 30 | μA |
| 15 | |

| | SYMBOLS | 1N4001 | 1N4002 | 1N4003 | 1N4004 | 1N4005 | 1N4006 | 1N4007 | UNIT |
|--|---------------------|---------------|--------|--------|--------|--------|--------|--------|--------------|
| Maximum Repetitive Peak Reverse Voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum RMS Voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | Volts |
| Maximum DC Blocking Voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum Average Forward Rectified Current, 0.375" (9.5mm) lead length at $T_A = 75^\circ C$ | $I_{(AV)}$ | 1.0 | | | | | | | Amp |
| Peak Forward Surge Current 8.3ms single half sine - wave superimposed on rated load (JEDEC method) | I_{FSM} | 30 | | | | | | | Amps |
| Maximum Instantaneous Forward Voltage at 1.0A | V_F | 1.1 | | | | | | | Volts |
| Maximum DC Reverse Current at rated DC blocking voltage | $T_A = 25^\circ C$ | | | | | | | | μA |
| | $T_A = 100^\circ C$ | | | | | | | | μA |
| Maximum Full Load Reverse Current, full cycle average 0.375" (9.5mm) lead length at $T_L = 75^\circ C$ | $I_{R(AV)}$ | | | | | | | | |
| Typical Junction Capacitance (Note 1) | C_J | | | | | | | | pF |
| Typical Thermal Resistance (Note2) | $R_{\theta JA}$ | 50 | | | | | | | $^\circ C/W$ |
| Operating and Storage Temperature Range | T_J | (-65 to +175) | | | | | | | $^\circ C$ |
| Storage Temperature Range | T_{STG} | (-65 to +175) | | | | | | | $^\circ C$ |

NOTES:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
2. Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) lead length, P.C. board mounted with 0.2" x 0.2" (5.0 x 5.0mm) copper pads.

RATINGS AND CHARACTERISTIC CURVES IN4001 THRU IN4007

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

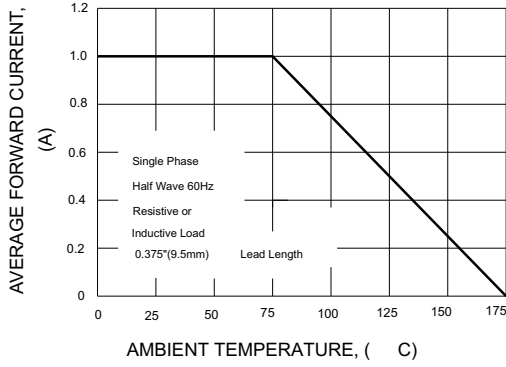


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

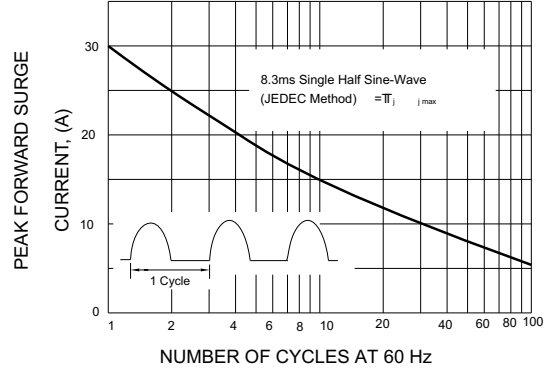


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

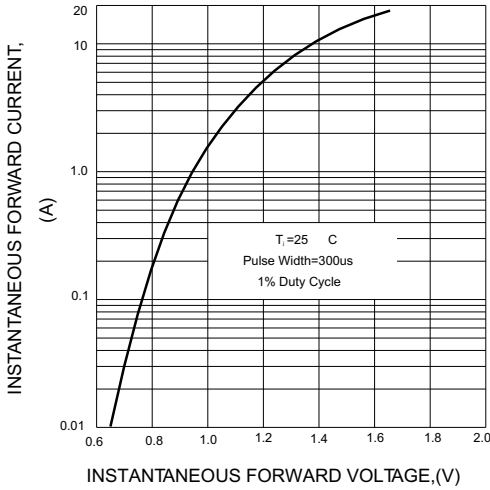


FIG.4-TYPICAL REVERSE CHARACTERISTICS

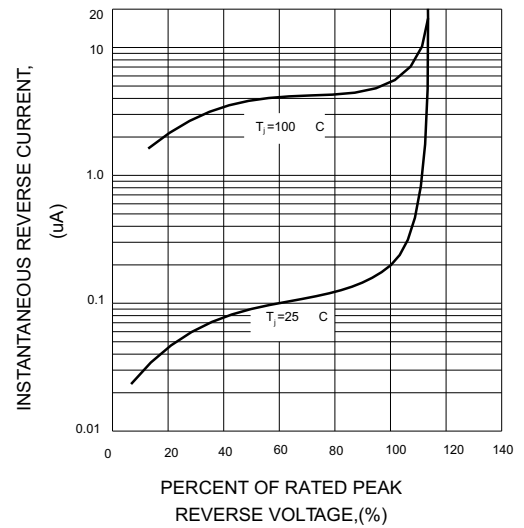


FIG.5-TYPICAL JUNCTION CAPACITANCE

